



# Fluid-Trac® 3-Wire Resistive Output

## Product Description

The Fluid-Trac® 3-wire Resistive Output sensor is a non-contact liquid level sensor that offers a wide variety of input and output options which enables it to interface with many different microprocessor-controlled fuel gauges or digital instrumentation.

The Fluid-Trac® 3-wire Resistive Output liquid level sensor can be factory programmed to have a resistive output in the range of 8 to 320 ohms. The FluidTrac® 3-wire resistive output liquid level sensor allows direct replacement of 33-240 ohm float senders or 10-180 ohm float senders.

## Measurement Technology

The traditional resistive float sender uses a potentiometer attached to a float at the end of an actuating arm to provide a level indication. This technology interfaces with the instrument cluster's fuel gauge which is typically a coil driven needle gauge. As the resistive float sender's resistance changes with level, the current through the coil in the gauge changes causing a deflection of the needle. This approach has been used for many years.

Fluid-Trac® uses ultrasonic technology to generate a high frequency sound wave and measure the time for the echo to reflect off of the liquid's surface and return. The distance from the level sensor to the fuel is calculated based on the speed of sound. The measured distance is converted into a resistance that drives the fuel gauge based on a strapping table contained in the level sensor.

## Product Features

- **More Accurate:** Distance accuracy of  $\pm 2.5\%$  full scale span of distance.
- **More Reliable:** Fluid-Trac® is non-contacting. Resistive float sender have a wiper that slides across a resistive strip that with time can wear and cause intermittent or complete loss of the signal.
- **Non-Invasive:** Fluid-Trac® mounts to the same opening as the resistive float sender, but does not protrude into the tank.
- **Easier to Install or Service:** Fluid-Trac® has no components to protrude into the tank that need to be bent for removal.
- **Digital Filtering:** Digital filtering eliminates errors due to liquids sloshing in mobile tanks.
- **Tank Profiling:** Factory programmable strapping tables for unique tank shapes.
- **Chemical compatibility:** Fluid-Trac® works with a wide variety of media including gasoline, diesel, urea (AdBlue), oils, hydraulic fluid, black/gray water
- **Tank Volumetric Error Detection:** Optional factory programmed resistance for error detection.
- **Minimal Dead Band:** No bottom dead band like on other senders. Optional Fluid-Trac® mounting adapter can be used to reduce or potentially eliminate the top dead band of 2 inches (51 mm).
- **American Boat and Yacht Council (ABYC) Certified**

## Electrical Interface

The Fluid-Trac® 3-wire Resistive Output liquid level sensor has a factory programmable resistance output. The Fluid-Trac® 3-wire liquid level sensor can be programmed to have a resistive output to emulate a 33-240 ohm resistive float sender or a 10 – 180 ohm resistive float sender. The Fluid-Trac® 3-wire liquid level sensor interfaces to fuel gauges using three wires – power, ground and output as shown below:

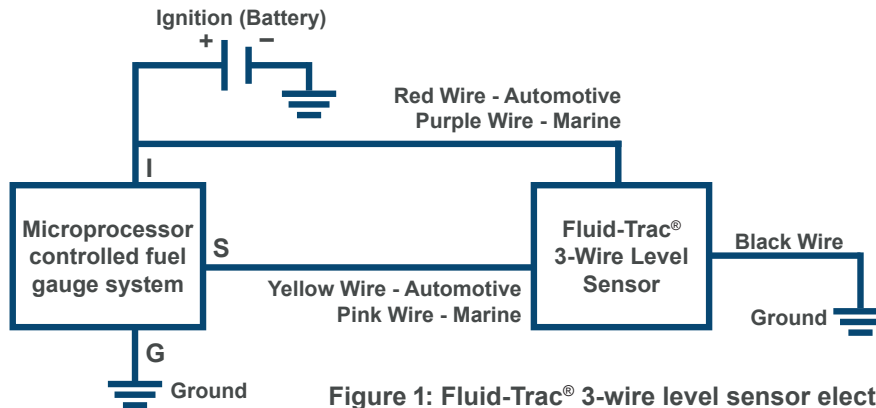


Figure 1: Fluid-Trac® 3-wire level sensor electrical interface

The Fluid-Trac® 3-wire Resistive Output liquid level sensor can also be programmed for error detection of tank volumetric levels for use by digital instrumentation, control modules, PLC controllers, or DAQ systems. An error condition can be indicated by programming the resistive output to a diagnostic indication.

## Mounting

The Fluid-Trac® 3-wire Resistive Output liquid level sensor can mount in a variety of ways. Common mounting styles use 1 3/16th machine threaded or the standard SAE 1810 5-bolt pattern. When mounting the Fluid-Trac®, it is important to place the Fluid-Trac® sensor's face in the center of the tank perpendicular to the liquid level and with no obstructions in the beam path to the liquid.

In low clearance applications, the Fluid-Trac® 3-wire Resistive Output liquid level sensor bolts in and bolts out quickly. There are no extended swing arms or tubes to bend or cut as with the resistive float or reed switch senders.

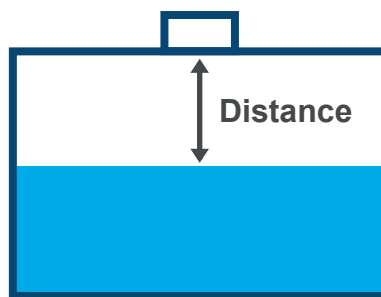


Figure 2: Fluid-Trac® Tank Mounting

## Operating Angle

Fluid-Trac® liquid level sensor mounting that is not perpendicular to the fluid causes a reduction in sensor performance. As shown in Figure 3, the amount of returned sound energy is dependent on target angle.

The Fluid-Trac® 3-wire Resistive Output liquid level sensor maximum operating range (tank depth) decreases with target angle. The maximum operating angle is 6° but can be increased to 15° with an optional focus tube.

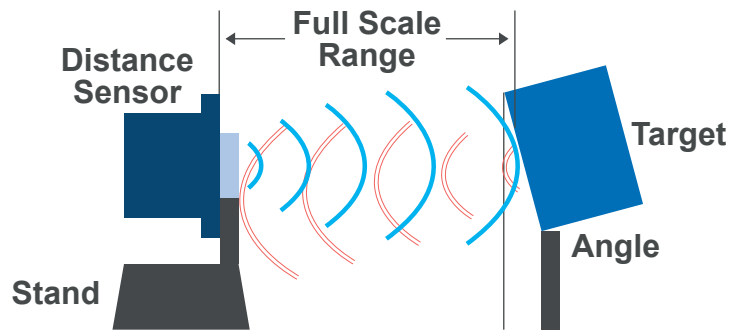


Figure 3: Mounting Considerations

If the Fluid-Trac® liquid level sensor is pointed into free space (outside of the maximum operating angle) no echoes will be received. Under this no echo condition the sensor output will hold at its last output resistance until valid echoes are received.

## Response Time

Fluid-Trac® liquid level sensor has a factory programmed digital filter to reduce error caused by sloshing fluids.

Motion of the liquid media can impact the performance of a level sensor. Wave motion creates noise in the measured data because the level sensor measures one distance at the wave peak and another distance during the wave troughs.

In certain highway and marine applications, this difference can be as high as 30% of full scale especially when traveling on curvy roads or in choppy waters. For fuel level applications, the liquid level changes at a much slower rate (fuel consumption) than 1 inch per second. A 4 minute filter may be factory programmed for this high slosh condition.

**Note:** When filling a tank with a Fluid-Trac® 3-wire Resistive Output liquid level sensor containing a digital filter, the sensor will not indicate an instantaneous level change. The output resistance will be updated at the response time corresponding to the programmed digital filter.

SSI engineering works with customers to assure the correct digital filtering is applied for their specific application needs.

## Electrical Specifications

Supply Voltage	9-30 Vdc
Resistive Output	8-320 Ohms Programmable
Range	2 inches to 32 inches
Range (Gasoline)	2 inches to 24 inches
Distance Resolution	0.07 inches
Distance Tolerance	± 2.5% of span
Operating Temp Range	-40 °C to 85 °C (-40 °F to 185 °F)
Storage Temp Range	-50 °C to 100 °C (-58 °F to 212 °F)
Output Sink Current	100 mA max

**Note:** Gasoline range is different due to the density of gasoline vapors. Gasoline vapors are denser as the temperature increases which results in the speed of sound being slower.

## Tested Conditions

Input Supply Transients	Reverse Battery 48 Volts, Over Voltage 60 Volts
Transients	Load Dump 120 Volts, ESD 15 KV
EMI	100 V/m
Mechanical Shock	18 G Shock
Drop Test	4 Foot Drop Test
Vibration	4 Grms 8 hours each axis
Humidity	85 % humidity at 85 °C for 1000 hrs
Chemical Compatibility	Gasoline, Diesel Fuel, Motor Oil, Urea (AdBlue), Water, Potable Water, Ethanol, Hydraulic Fluid, Engine Coolant

**Note:** Fluid-Trac® is American Boat and Yacht Council (ABYC) Certified.

## Other Specifications

SAE 5 Bolt Torque	10-15 in/lbs	Packard Electric Part	Fluid-Trac® P/N	Mating P/N
1 3/16" Threaded Torque	3-5 ft/lbs	Connector Assembly	12129615	12110293
		Terminal	12045773	12048074
		Seal	12048086	12048086
		Terminal Position Assurance (clip)	12052845	12052845

**Note:** The Fluid-Trac® 3-wire Resistive Output liquid level sensor comes with an integral gasket that must be used when mounting. Mating connector parts and bolts are not included. A mating connector kit P/N 24564.3 is available

## European Accessories

Accessory	P/N
Standard European 6 Hole to SAE J1810 Adapter	12129615
Standard European 6 Hole Gasket, mates with 25393.1	12045773

# Contact

## *SSI Technologies, LLC*

3200 Palmer Drive, Janesville, WI 53546

ssi-sensors.com

1 (608) 757-2000



SSI Technologies, LLC is an Amphenol Advanced Sensors company.



*SSI Technologies, LLC*  
— an Amphenol Company —

## Warranty

**LIMITED WARRANTY:** All SSI products are warranted against defective materials and workmanship for a period of one (1) year from the date of delivery to the original purchaser. Any product that is found to be defective within the one year period will be replaced at the discretion of SSI. **THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, PERFORMANCE, OR OTHERWISE.** SSI is not an expert in the customer's technical field and therefore does not warrant the suitability of its products for the applications selected by the customer. SSI accepts no responsibility for misuse, misapplication or unauthorized modification of its products.

**LIMITATION OF LIABILITY:** SSI's obligation under this limited warranty is strictly and exclusively limited to the repair or replacement free of charge of such articles as are found to be defective in material or workmanship on the condition that the purchaser gives prompt written notice to SSI of any claim to breach of warranty within the warranty period, and, if requested, returns the defective articles to SSI. SSI will not assume any expenses or liability for repairs made to its articles outside of its plant, without its prior written consent. SSI reserves the right to satisfy its warranty obligation in full, with respect to defective articles, by the payment to the purchaser of all sums paid by the purchaser to SSI for such articles. **IN NO EVENT SHALL SSI BE LIABLE FOR CLAIMS (BASED UPON BREACH OF EXPRESS OR IMPLIED WARRANTY, NEGLIGENCE OR OTHERWISE) FOR ANY DAMAGES, WHETHER DIRECT, IMMEDIATE, INCIDENTAL, FORESEEABLE, CONSEQUENTIAL, OR SPECIAL.**

## Terms & Conditions

Please visit [<https://www.ssi-sensors.com/contact/supplier-portal>] for information regarding the SSI Technologies, LLC Terms & Conditions.

**Note:** Specs are subject to change without notice.