



# Fluid-Trac® 3-Wire Level Sensor

## (Interface to Microprocessor-controlled Instrumentation)

### Fuel Gauge Application

This application note covers the Fluid-Trac® 3-wire liquid level sensor used as a replacement for a standard 33-240 Ohm resistive float sender, reedswitch tube sensor, or capacitive tube sender to interface with microprocessor-controlled fuel gauges or digital instrumentation. (I.e. electronic dashes).

### Traditional Float Fuel Senders

Some fuel monitoring systems consist of three components – a liquid level sender; a microprocessor and a fuel gauge or digital instrumentation. The liquid level sender measures the level of fuel in the tank. The liquid level sender sends the information to microprocessor which then sends the data to the fuel gauge or digital instrumentation to display the signal generated level.

One common liquid level sender is a 33-240 Ohm resistive float sender. It consists of a float attached to an actuating arm (rod) with a variable resistor (potentiometer) mounted at the end of this rod. These devices tend to be inaccurate especially when used in irregular shaped tanks.

The resistive float sender interfaces with the microprocessor-controlled fuel gauge or digital instrumentation via a wiper that slides across the resistive material of the potentiometer. The resistance of the float sender changes with the float's position.

### Fluid-Trac® Ultrasonic Liquid Level Sensor

The Fluid-Trac® 3-wire liquid level sensor replaces the traditional resistive float sender as a more robust and accurate liquid level sensor in fuel monitoring systems with stationary or mobile fuel tanks with  $\leq 32$  inch depths.

The Fluid-Trac® 3-wire liquid level sensor uses ultrasonic technology to generate a high frequency sound wave that reflects off the fuel. The time for the echo to reflect off of the fuel surface and return to the liquid level sensor is used to calculate the level of the fuel inside the fuel tank. The distance from the sensor to the fuel is calculated, using the speed of sound. This measured distance is then compared to a strapping table (tank profiling software) and converted into a voltage that the microprocessor uses to drive the fuel gauge or digital instrumentation to indicate the correct liquid level.

The Fluid-Trac® family of 3-wire liquid level sensors offers a wide variety of input and output options which enables them to interface with many different microprocessor-controlled fuel gauges or digital instrumentation.

## Fluid-Trac® Ultrasonic Liquid Level Sensor Continued

Fluid-Trac® 3-wire liquid level sensors can interface with either 12 V (automotive applications) or 24 V (large diesel engines, construction, industrial, marine applications) input voltage supplies.

The Fluid-Trac® 3-wire liquid level sensor has a fully programmable voltage output. The output can be programmed to be either a ratiometric or nonratiometric voltage within a 0.5 Vdc to 4.5 Vdc range.

The Fluid-Trac® 3-wire liquid level sensor is more accurate than resistive float senders with a distance accuracy of  $\pm 2.5\%$  full scale span.

The Fluid-Trac® 3-wire liquid level sensor is mounted on top of the fuel tank. It mounts to the same opening as the resistive float sender. It is non-contacting (no float arm inside the fuel tank) and does not have any moving parts to wear out. The resistive float sender's wiper slides across a resistive strip that can wear out over time which may result in intermittent or even a complete loss of the signal to the fuel gauge or digital instrumentation.

The Fluid-Trac® 3-wire liquid level sensor operates in temperature ranges from  $-40\text{ }^{\circ}\text{C}$  to  $85\text{ }^{\circ}\text{C}$  and is programmable with a digital filtering to reduce error caused by liquid sloshing in mobile fuel tanks.

The Fluid-Trac® 3-wire liquid level sensor is not affected by corrosive fuel additives or low sulfur fuels.

### Mounting

The Fluid-Trac® 3-wire liquid level sensor can mount in a variety of ways. Common mounting styles are either 1 3/16" machine threaded or the standard SAE 1810 5-bolt pattern. When mounting the Fluid-Trac®, it is necessary to place the Fluid-Trac® level sensor's face parallel to the liquid level (preferably in the center of the tank) and with no obstructions in the beam path to the liquid.

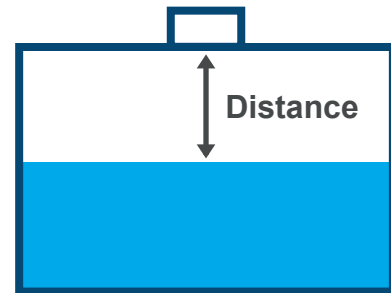


Figure 2: Fluid-Trac® Tank Mounting

## Electrical Interface

The Fluid-Trac® 3-wire liquid level sensor's programmable features allow it to interface with microprocessor-controlled fuel gauges or digital instrumentation in a wide variety of applications.

The Fluid-Trac® 3-wire liquid level sensor can be factory programmed to work with a 5 Volt regulated microprocessor control module. When the Fluid-Trac® 3-wire liquid level sensor is programmed for a ratiometric voltage output range of 0.5 V to 4.5 V, it emulates a 30-240 ohm resistive float sender.

The Fluid-Trac® 3-wire liquid level sensor can also be programmed for use by the microprocessor for error detection of tank volumetric levels. The 0.5 Vdc to 4.5 Vdc voltage output would be set for "in range" values instead of as "full" or "empty" indicators. An error will be indicated anytime the voltage output was  $< 0.5 \text{ Vdc}$  or  $> 4.5 \text{ Vdc}$ .

The Fluid-Trac® 3-wire liquid level sensor has an internal feedback system to allow for non-ratiometric outputs. It can be factory programmed to work with non-regulated input voltage microprocessor control modules.

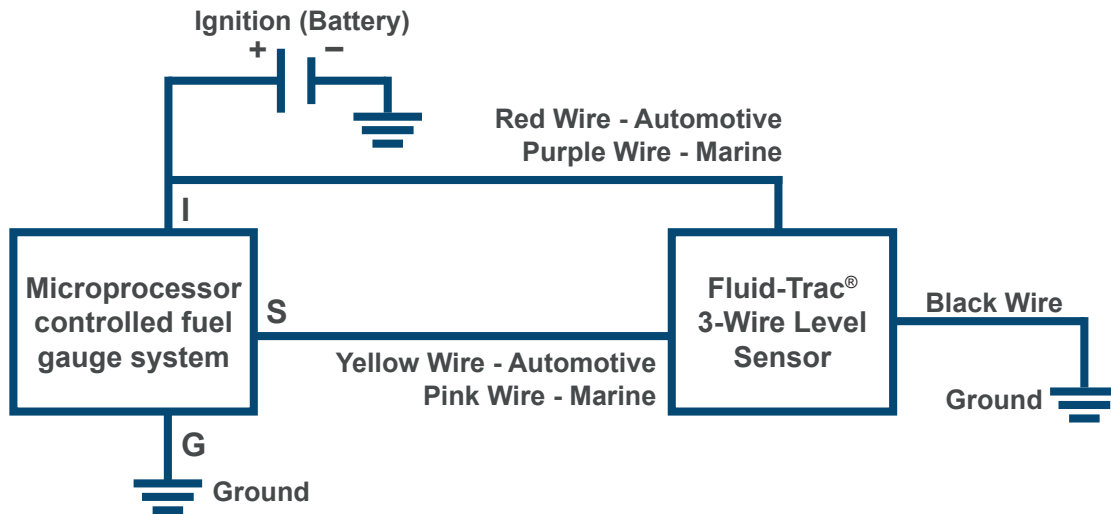


Figure 1: Fluid-Trac® 3-wire level sensor interface to microprocessor-controlled fuel gauge

# Contact

## *SSI Technologies, LLC*

3200 Palmer Drive, Janesville, WI 53546

ssi-sensors.com

1 (608) 757-2000



Made In USA



SSI Technologies, LLC is an Amphenol Advanced Sensors company.



*SSI Technologies, LLC*  
— an Amphenol Company —

## Warranty

**LIMITED WARRANTY:** All SSI products are warranted against defective materials and workmanship for a period of one (1) year from the date of delivery to the original purchaser. Any product that is found to be defective within the one year period will be replaced at the discretion of SSI. **THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, PERFORMANCE, OR OTHERWISE.** SSI is not an expert in the customer's technical field and therefore does not warrant the suitability of its products for the applications selected by the customer. SSI accepts no responsibility for misuse, misapplication or unauthorized modification of its products.

**LIMITATION OF LIABILITY:** SSI's obligation under this limited warranty is strictly and exclusively limited to the repair or replacement free of charge of such articles as are found to be defective in material or workmanship on the condition that the purchaser gives prompt written notice to SSI of any claim to breach of warranty within the warranty period, and, if requested, returns the defective articles to SSI. SSI will not assume any expenses or liability for repairs made to its articles outside of its plant, without its prior written consent. SSI reserves the right to satisfy its warranty obligation in full, with respect to defective articles, by the payment to the purchaser of all sums paid by the purchaser to SSI for such articles. **IN NO EVENT SHALL SSI BE LIABLE FOR CLAIMS (BASED UPON BREACH OF EXPRESS OR IMPLIED WARRANTY, NEGLIGENCE OR OTHERWISE) FOR ANY DAMAGES, WHETHER DIRECT, IMMEDIATE, INCIDENTAL, FORESEEABLE, CONSEQUENTIAL, OR SPECIAL.**

## Terms & Conditions

Please visit [<https://www.ssi-sensors.com/contact/supplier-portal>] for information regarding the SSI Technologies, LLC Terms & Conditions.

**Note:** Specs are subject to change without notice.