



DFT-110 Product Overview

Product Overview

Digital Fluid-Trac® Model DFT-110 multi unit drum level gauge is a cost competitive non-contact liquid level drum gauge. The DFT-110 drum gauge was designed for usage on ANSI MH2-2004 vertical drums (≤ 32 inch depths). The DFT-110 drum gauge allows the user to easily select between the following vertical drum settings: 15 gallon, 30 gallon, 55 gallon, 57 liter, 114 liter, and 208 liter.

Product Features

- **Display Resolution:** ± 0.5 gallon or ± 1 liter *
- **Accuracy:** $\pm 2.5\%$ (1.5 gallons or 6 liters) of full scale volume (55 gallons / 208 liters setting) *
- **Automatic Shutoff Prolonging Battery Life**
- **NEMA 4 Packaging**
- **Static Display Useful for Usage Consumption Calculations:** The static level reading can be used for manual rate calculations – i.e. daily or weekly consumption.
- **Low Level Warning Light:** A red LED will flash once every second when the volume is at 10% or below the maximum volume.
- **Easy to install:** Digital Fluid-Trac® DFT-110 has no components to protrude into the drum.
- **Standard:** Fits 2" NPT or $\frac{3}{4}$ " NPS opening
- **Deadband:** 6" from top of barrel when using the optional $\frac{3}{4}$ " adaptor
- **More Reliable:** No components to chemically corrode inside liquid media.
- **Chemical compatibility:** Digital Fluid-Trac® DFT-110 drum gauge works with a wide variety of media such as water, waste water, motor oil, hydraulic fluid and diesel fuel.

Note: The Digital Fluid-Trac™ is NOT intended for use with gasoline or other volatile liquids that produce a vapor pressure under normal operating temperature (0 °C - 50 °C).

* Outside of stated dead band.

Measurement Technology

The Digital Fluid-Trac® DFT-110 drum level gauge uses ultrasonic technology to generate a highfrequency sound wave and measures the time for the echo to reflect off the target fluid's surface and return. The distance from the Digital Fluid-Trac®'s sensor to the liquid is calculated based on the speed of sound.

The Digital Fluid-Trac® DFT-110 has a LCD which displays the liquid level pictorially as well as in gallon (or liter) units. The display shows the level reading from the last time the Refresh/Select button was pressed.

When the Refresh/Select button is pressed and released, the DFT-110's back-light is illuminated and 8.8.8. is displayed for 4 seconds to indicate the unit is in test mode. The unit continuously monitors the media in the vertical drum for 7 seconds and then displays the liquid level. The level reading will remain static until the Refresh/Select button is depressed again.

20 seconds after the button was pressed, the unit will go into a battery saver mode where the backlight is shut off. The liquid level reading will be displayed for 5 minutes before the display turns off.

A low-level warning light (red LED located on the bottom left of the LCD display), will flash once every second when the liquid level is $\leq 10\%$ the maximum volume.

Note: This warning light does not operate once the unit has powered down in battery saver mode.

Electrical Interface

The Digital Fluid-Trac® DFT-110 drum gauge is powered by two 9 V batteries (not included). The unit can run on alkaline or lithium batteries.

If the battery life is low (voltage is below 14.2 V), "LoB "will continuously flash to notify the user to replace the batteries.

Displaying the DFT-110 Settings

- 1. Press and hold the Refresh/Select button down for 7 seconds.** The drum size will be displayed. And the selected units (Liters or Gallons) will be flashing.
- 2. Release the Refresh/Select button** and the unit will automatically go back into test mode (indicated by 8.8.8) in 20 seconds.

Selecting the Display Units

The Digital Fluid-Trac® DFT-110 multi-unit drum gauge can set to display the level reading in one of six different configurations - gallons (15, 30, 55) or liters (57, 114, 208).

1. **Enter the Select Mode:** Press and hold the Refresh/Select button down for 7 seconds to enter the Select Mode. The unit will display Liter and Gallon. One of the units will be flashing.

Note: If you release the button too soon, the DFT-110 will be in test mode.
2. **Switch the Desired Units:** Press and release the Refresh/Select button to switch between the units.
3. **Select the Desired Units:** When the units (Liters or Gallons) desired is flashing, press and hold the Refresh/Select button for 7 seconds to select the units. The units will stop flashing and the drum size will start flashing.
4. **Switch the Desired Drum Size:** Press and release the Refresh/Select button to switch between the drum sizes.
5. **Select the Desired Drum Size:** When the drum size desired is flashing, press and hold the Refresh/Select button for 7 seconds to select the drum size. The drum size will stop flashing.
6. **Return to Test Mode:** Press and hold the button until 8.8.8. is displayed – this indicates test mode.

Testing With the DFT-110

1. After you have selected the proper units and drum size for your application, **Press and release the Refresh/Select button.**
2. The DFT-110's back-light is illuminated and 8.8.8. is displayed for 4 seconds to indicate the unit is in **test mode.**
3. The DFT-110 continuously monitors the media in the vertical drum for 7 seconds and then displays this liquid level.
4. **Battery Saver Mode:** 20 seconds after the button was pressed, the back-light is shut off. The static liquid level reading will be displayed for 5 minutes before the display turns off.


Note: This liquid level displayed is a static value. You must depress the Refresh/Select button to update the liquid level reading.
5. **A low-level warning light** (red LED located on the bottom left of the LCD display), will flash once every second when the liquid level is $\leq 10\%$ the maximum volume.

Note: This warning light does not operate once the unit has powered down in battery saver mode.

Mounting

Digital Fluid-Trac® works well on ANSI MH2 standard 55 gallon drums as it mates with closedhead standardized bunghole arrangements. The 55 gallon drum gauge mounts on top of the drum with a standard 2" NPT thread connector. A ¾ inch NPS threaded adapter is included with each Digital FluidTrac® Model DFT-110 so either bung opening can be used on the drums.

When using the Digital Fluid-Trac®, it is important to keep the mounting perpendicular to the liquid level by storing the drums in an upright position.

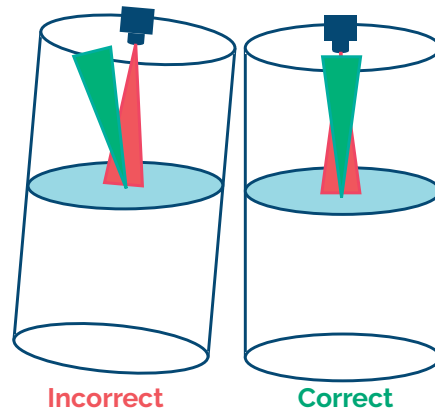

Electrical Specifications

| | |
|--|-----------------------------------|
| Resolution (Gallons) ** | 0.5 gallons |
| Resolution (Liters) ** | 1 Liter |
| Operating Temperature | 0 °C to 50 °C |
| Battery Life * | 6 months alkaline, 1 year lithium |
| Low Level Warning Activation (Red LED) | ≤ 10% Max Volume |
| Low Battery Level (Lob) | ≤ 14.2 Volts Combined |

* Battery Life will vary dependant on operator's usage.
Battery specification is based on two level readings per day.

** Outside of stated dead band

Material Specifications

| Description | Material |
|--|--|
| Display housing / threaded adaptor (blue plastic) | PBT (Polybutylene terephthalate), 15% glass filled |
| Transducer housing (black plastic inside threaded adaptor) | HDPE (High Density Polyethylene) |

Contact

SSI Technologies, LLC

3200 Palmer Drive, Janesville, WI 53546

ssi-sensors.com

1 (608) 757-2000



SSI Technologies, LLC is an Amphenol Advanced Sensors company.



SSI Technologies, LLC
— an Amphenol Company —

Warranty

LIMITED WARRANTY: All SSI products are warranted against defective materials and workmanship for a period of one (1) year from the date of delivery to the original purchaser. Any product that is found to be defective within the one year period will be replaced at the discretion of SSI. **THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, PERFORMANCE, OR OTHERWISE.** SSI is not an expert in the customer's technical field and therefore does not warrant the suitability of its products for the applications selected by the customer. SSI accepts no responsibility for misuse, misapplication or unauthorized modification of its products.

LIMITATION OF LIABILITY: SSI's obligation under this limited warranty is strictly and exclusively limited to the repair or replacement free of charge of such articles as are found to be defective in material or workmanship on the condition that the purchaser gives prompt written notice to SSI of any claim to breach of warranty within the warranty period, and, if requested, returns the defective articles to SSI. SSI will not assume any expenses or liability for repairs made to its articles outside of its plant, without its prior written consent. SSI reserves the right to satisfy its warranty obligation in full, with respect to defective articles, by the payment to the purchaser of all sums paid by the purchaser to SSI for such articles. **IN NO EVENT SHALL SSI BE LIABLE FOR CLAIMS (BASED UPON BREACH OF EXPRESS OR IMPLIED WARRANTY, NEGLIGENCE OR OTHERWISE) FOR ANY DAMAGES, WHETHER DIRECT, IMMEDIATE, INCIDENTAL, FORESEEABLE, CONSEQUENTIAL, OR SPECIAL.**

Terms & Conditions

Please visit [<https://www.ssi-sensors.com/contact/supplier-portal>] for information regarding the SSI Technologies, LLC Terms & Conditions.

Note: Specs are subject to change without notice.